

Rueda Poliuretano para Ascensores / Polyurethane Roller Guides



Ruedas y rodillos con núcleo de fundición mecánica de calidad pintada o de acero.

Recubrimiento de poliuretano AVOLAN 92 ShA, un elastómero de poliuretano que responde a una alta carga de rotura y un alto módulo elástico. Resulta por lo tanto notablemente resistente a la compresión, flexión y abrasión vuelve rápidamente a las condiciones iniciales, incluso después de haber sufrido un fuerte carga estática.

Wheels and rollers with as firon or steel core.

Wheel coating in AVOLAN polyurethane 92 ShA: a polyurethane elastomer which complies with the requirements for high breaking load and high elastic module. This material offers considerable resistance to compression, flexion and abrasion and rapidly return stoits original condition, even after being subjected to a strong static load.

EJES EXCÉNTRICOS

Son posibles creaciones especiales

ECCENTRIC SHAFTS

Can be supplied according to customer drawing




PERNI ECCENTRICI PER RUOTE

ECCENTRIC SHAFTS FOR WHEELS

M	P	ØF	A	B	C	ØD	L	CH
M12	20	20	12	19	30	20	65	32
M12	26	25	14	28	30,5	20	80	36


RUEDA DE POLIURETANO CON 2 COJINETES
POLYURETHANE WHEELS WITH 2 BALL BEARINGS

ØD	L	M	ØC	M	ØF	daN Dynamic
						
40	30	27	28	8,5	15	100
50	30	30	35	11	15	120
50	40	40	35	11	15	130
68	38	38	42	12	20	150
75	40	40	47	14	20	300
78	30	30	47	14	20	300
80	40	40	47	14	20	400
85	30	30	47	14	20	300
85	40	40	47	14	20	400
100	30	30	47	12	25	280
100	30	30	47	14	20	280
100	30	30	47	12	25	280
100	30	30	47	14	20	280
100	40	37	47	13,5	25	300
125	30	30	47	14	20	300
125	35	35	47	12	25	350
125	40	40	47	12	25	400
150	30	30	62	14	35	400
150	38	38	47	12	25	500

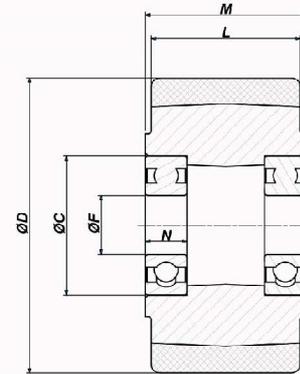


POLYURETHANE WHEELS WITH SINGLE BALL BEARING

ØD	L	M	ØC	M	ØF	daN Dynamic
						
40	15	8	26	8	10	100
50	15	8	26	8	10	110
50	20	10	35	10	17	110
60	20	12	42	12	20	120
80	20	10	32	10	12	150
80	25	15	52	15	25	200
125	40	26	55	26	30	400
150	35	19	72	19	30	450



POLYURETHANE WHEELS WITH SINGLE BALL BEARING AND HIGH PRECISION MACHINED TREAD


ØD	L	M	ØC	M	ØF	daN Dynamic
						
40	15	8	26	8	10	100
48	15	9	32	9	15	110
60	30	20	35	20	14	120
65	30	20	35	20	17	150
123	40	26	55	26	30	400





RUEDA CON REVESTIMIENTO DE POLIURETANO Y 2 COJINETES CON CARA TORNEADA
POLYURETHANE WHEELS WITH 2 BALL BEARINGS AND HIGH PRECISION MACHINED TREAD

ØD	L	M	ØC	M	ØF	daN Dynamic
55	30	30	42	12	20	120
70	30	30	47	14	20	150
78	30	30	47	14	20	300
80	30	30	47	14	20	300
80	31	31	47	14	20	300
83	30	30	47	14	20	300
85	31	31	47	14	20	300
95	25	25	35	11	15	300
98	30	30	47	14	20	300
100	30	30	47	14	20	300
103	30	30	47	14	20	300
120	25	32	47	14	20	250
120	30	30	35	11	15	300
123	30	30	47	14	20	300
123	30	30	47	12	25	300
123	35	35	47	14	20	350
123	35	35	47	12	25	350
123	40	40	47	12	25	400
123	40	40	47	14	20	400
148	30	30	62	14	35	400
148	30	30	40	12	17	400
148	35	35	47	14	20	450
150	40	40	47	12	25	500

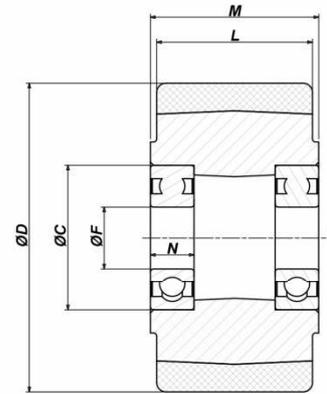

EJES EXCÉNTRICOS
ECCENTRIC SHAFTS FOR WHEELS

M	A	B	C	ØD	L	CH
M14	40	21	30	20	96	36
M20	40	21	30	20	96	36
M12	30	26	9	15	76	25
M16	37,5	27,5	30	25	99,5	50
M24	40	21	40	20	112	40
M16	30	34,5	15	25	88	30
M16	37,5	29	30	25	99,5	36
M16	30	31,5	30	20	102	34
M20	40	21,5	40	25	112	36
M20	40	21	40	20	106	36
M16	30	33	35	20	107	34
M20	32	21	30	20	88	36
M16	30	21	30	20	90	34

